


IMC RYMCO®



Intermediate Metallic Conduit

R Y M C O®
C A L I D A D 3 6 0

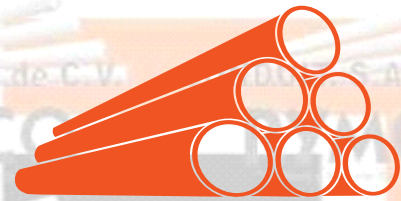

- Hot dipped galvanized by immersion with a triple layer of protection against corrosion and abrasion the interior wall is covered with a specially formulated non-corrosive lubricating coating, Freedom Coat.
- Threads are galvanized after cutting.
- Used for industrial installations in electrical systems.
- Standard length: 10 feet.
- Coupling included



Tubería IMC / Intermediate Metallic Conduit Steel

Diámetro Nominal		Peso 10 tramos		Diámetro Externo (1)		Espesor Nominal (1)		Color de tapón Thread Prot. Color	Piezas x atado Pieces x bundle	Piezas x paquete Pieces x lift
Nominal Size		Weight 10 Unit Lengths		Outside Diameter (1)		Nominal Thickness (1)				
in.	mm.	lb.	kg.	in.	mm.	in.	mm.			
1/2"	16	62	28.12	0.815	20.70	0.078	1.97	Yellow	10	350
3/4"	21	84	38.10	1.029	26.26	0.083	2.1	Green	5	250
1"	27	119	53.98	1.290	32.77	0.093	2.35	Orange	5	170
1 1/4"	35	158	71.67	1.638	41.59	0.095	2.41	Green	---	135
1 1/2"	41	194	88.00	1.883	47.82	0.100	2.54	Yellow	---	110
2"	53	256	116.12	2.360	59.93	0.105	2.67	Orange	---	80
2 1/2"	63	441	200.04	2.857	72.57	0.150	3.81	Yellow	---	37
3"	78	543	246.30	3.476	88.29	0.150	3.81	Orange	---	30
3 1/2"	91	629	285.31	3.971	100.86	0.150	3.81	Yellow	---	24
4"	103	700	317.52	4.466	113.44	0.150	3.81	Orange	---	24

Nota: Tolerancias Aplicables
Note: Applicable Tolerances

Largo/Length: 10 Ft. (3.05m) w/coupling +/- 1/4 in. (+/-6mm)
(1) Promedio de máx. y min. de UL 1242. / Average from max. and min. from UL 1242